



- 1.1kw thruster develops over 55lbf (23 kgf) forward & over 32lbf (14.5kgf) reverse thrust.
- Powerful geared DC brushless motors for low noise in noise sensitive applications.
- Magnetically coupled propeller drive eliminates all rotating shaft seals for optimum reliability.
- High efficiency propeller & Kort nozzle for maximum Bollard thrust.
- Injection molded Nylon LH rotation propeller (standard) or investment cast Type 316 stainless steel propeller in either RH and LH rotation.
- Available with +/-5v analog or RS485 closed loop speed control.
- Rated to 2,800 ft (850m) or optional 5,000 ft (1,500m) depth with 1 atmosphere housings or full ocean depth with oil filled, pressure balanced housings.
- Available with hard anodized 6061-T6 aluminum, Type 316 stainless steel or 6Al4V titanium housings.
- Available with motors for 48vdc, 60vdc, 95vdc, 120vdc, 150vdc, 175vdc, 200vdc, 260vdc or 330vdc. Other voltages optional.

### **Bollard Output**

55lbf (22.7kgf) forward, 32lbf (14.5kgf) reverse, w/ either LH Nylon or RH or LH stainless steel propellers.

### **Input**

1.1kw at 48vdc, 60vdc, 95vdc, 120vdc, 150vdc, 175vdc, 200vdc, 260vdc or 330vdc, +/-5v analog speed control.

### **Weight**

6-10.5lbs (2.7-4.8kg) in air, 4-7lbs (1.8-3.2kg) in water, depending on configuration.

### **Depth Rating**

2,800ft (850m) & 5,000ft (1,500m) with 1 atm housings, full ocean depth when oil filled (PBOF).

(specifications subject to change without notice)

**Introduction**

The Model 1020 was the first thruster developed by Tecnadyne 30 years ago. Since that time, it has undergone over 25 design revisions to improve reliability and maintainability. Because of its reliability, efficiency and high power, the Model 1020 has been accepted as a standard in the industry and continues to be one of the most sought after thrusters for mid-sized ROV's to this day.

**Magnetic Propeller Coupling**

As with all Tecnadyne thrusters, the propeller of the Model 1020 is magnetically coupled. With this design, a magnet array is fitted inside the hub of the propeller; and this magnet array is driven by a matching magnet array attached to the motor inside the sealed pressure vessel. By eliminating the rotating drive shaft and shaft seals that always seem to leak over time, the Model 1020 achieves extremely high reliability. Additionally, the magnetic coupling will ratchet if overloaded, preventing damage caused by objects jammed in the propeller. And since the water lubricated propeller bearings are external to the pressure housing, they can be easily replaced in a matter of minutes.

**High RPM Motor & Planetary Gearbox**

The Model 1020 uses DC brushless motors that are manufactured to the ISO 9001:2008 quality standard. These high RPM, low inertia motors are coupled to 6/1 ratio planetary gearset, assembled using hardened, high precision spur gears. This motor / gearbox combination delivers maximum reliability, efficiency and power in an extremely compact, lightweight and easy to maintain package.

**Highly Efficient Propeller & Nozzle**

The Model 1020 is available with a right hand rotation Nylon propeller or with stainless steel propellers in either right or left hand rotations. With a Kort nozzle optimized for Bollard thrust, the Model 1020 delivers impressive amounts of thrust at open water speeds exceeding 4 knots.

**Depth Rating Options**

The standard configuration is rated to 850m depth and places the electronics controller within the 1-atmosphere motor housing. An extra cost option, using titanium pressure components, is rated to 1,500m using self-contained electronics in the motor's 1-atmosphere housing. For full ocean depth rating, the electronics module is installed in a remote, one atmosphere housing (either the customer's housing or one supplied by Tecnadyne) and the thruster is oil filled and pressure balanced using electrical cabling of flexible Tygon tubing.

**Voltages Supported**

The Model 1020 is available for operation at voltages of 48vdc, 60vdc, 95vdc, 120vdc, 150vdc, 175vdc, 200vdc, 260vdc and 330vdc. DC power must be supplied by a well filtered battery bank, rectified and filtered AC or a regulated DC power supply with less than 10% voltage ripple.

**Analog Speed Control**

The Model 1020 thruster accepts a +/-5v analog speed and direction control signal that can be supplied by a computer with D/A card or a simple joystick. In addition, the thruster can be supplied with a separate digital speed feedback signal.

**Other Options**

Optional configurations include: saddle or blade style mounting; the nine available buss voltage choices previously mentioned; housings made from hard anodized aluminum (standard), Type 316 stainless steel or 6Al4V titanium; several bulkhead type or cable end subsea connectors; and RH or LH rotation propellers.

Custom propellers and Kort nozzles can be developed to suit specific operating requirements.

Please note that the specifications are subject to change without notice. Additionally, Model 1020 thrusters for operation to depths greater than 1,000 meters are subject to U.S. Government export controls.

Go to [www.tecnadyne.com](http://www.tecnadyne.com)



Like Tecnadyne on  
Facebook




**MODEL 1020**

1020-AAA-LMG6FS-XX-0850-AL-SCLX-SM-A-RH-UK



**WEIGHTS**  
 6lb [2.7kg] in air  
 4.5lb [2.1kg] in water

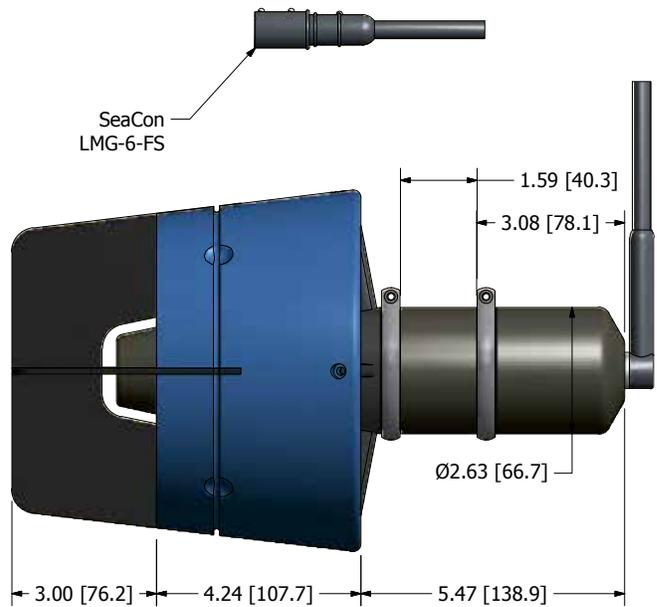


SCALE 1:4


Download STP solid model of this thruster here:  
<http://www.tecnadyne.com/thrusters>

**MODEL 1020**

1020-AAA-MHDG8CCP-XX-0850-SS-HPF(R)X-BM-A-RH-UK

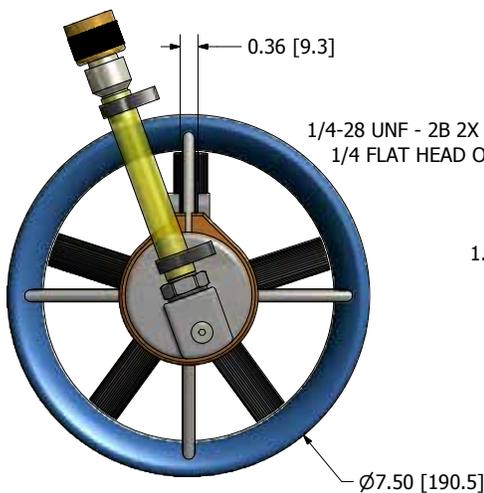

**WEIGHTS**  
 7lb [3.2kg] in air  
 5.5lb [2.5kg] in water


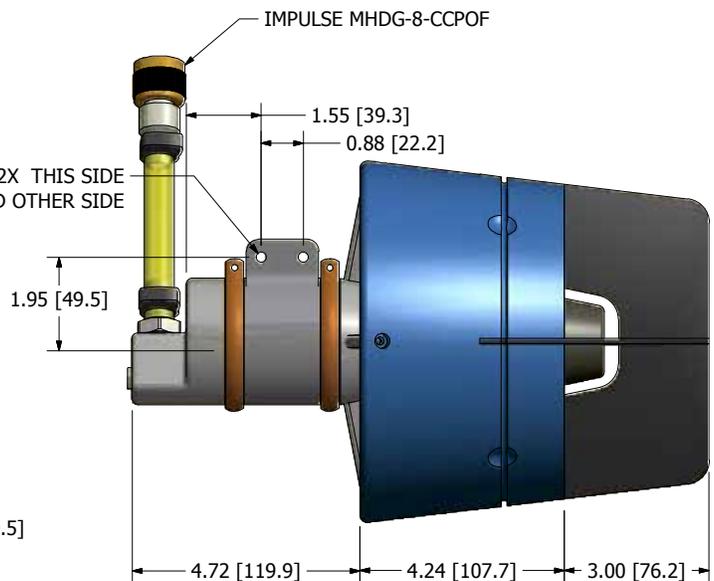


SCALE 1:4

Download STP solid model of this thruster here:  
<http://www.tecnadyne.com/thrusters>

**REMOTE ELECTRONICS MODULE, HPFX CONFIG**

USED IN THE **HPFX** CONFIGURATION & INSTALLED IN CUSTOMER FURNISHED PRESSURE VESSEL.

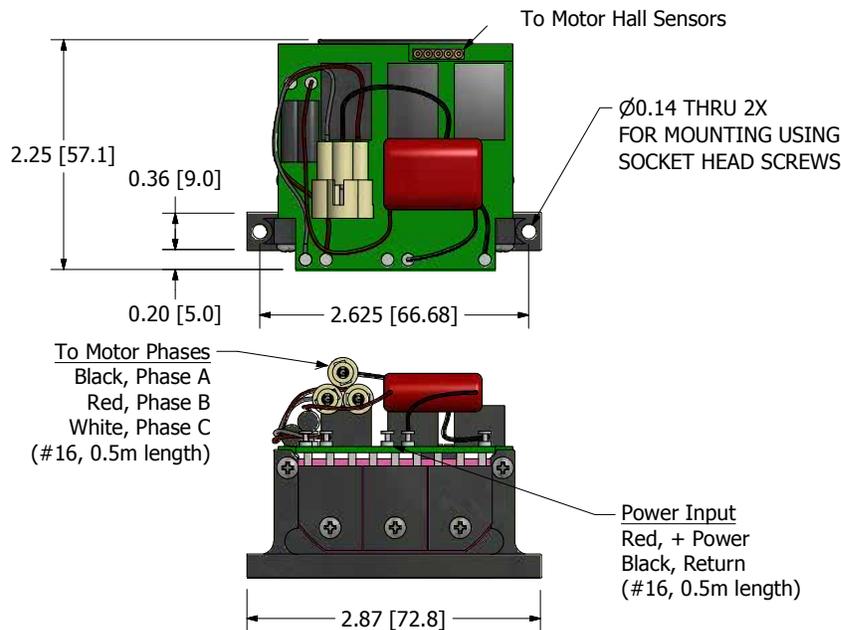


**Control Signal Input**  
 White, +/-5v Analog Control Signal  
 Blue, Isolated Control Signal Return  
 (#20, 0.5m length)  
 Optional Feedback Signal  
 Purple, Digital Speed Feedback Signal

SCALE 1:2

Download STP solid model of this electronics module here:  
<http://www.tecnadyne.com/thrusters>

**REMOTE ELECTRONICS MODULE, HPRX CONFIG**

USED IN THE **HPRX** CONFIGURATION & INSTALLED IN CUSTOMER FURNISHED PRESSURE VESSEL.

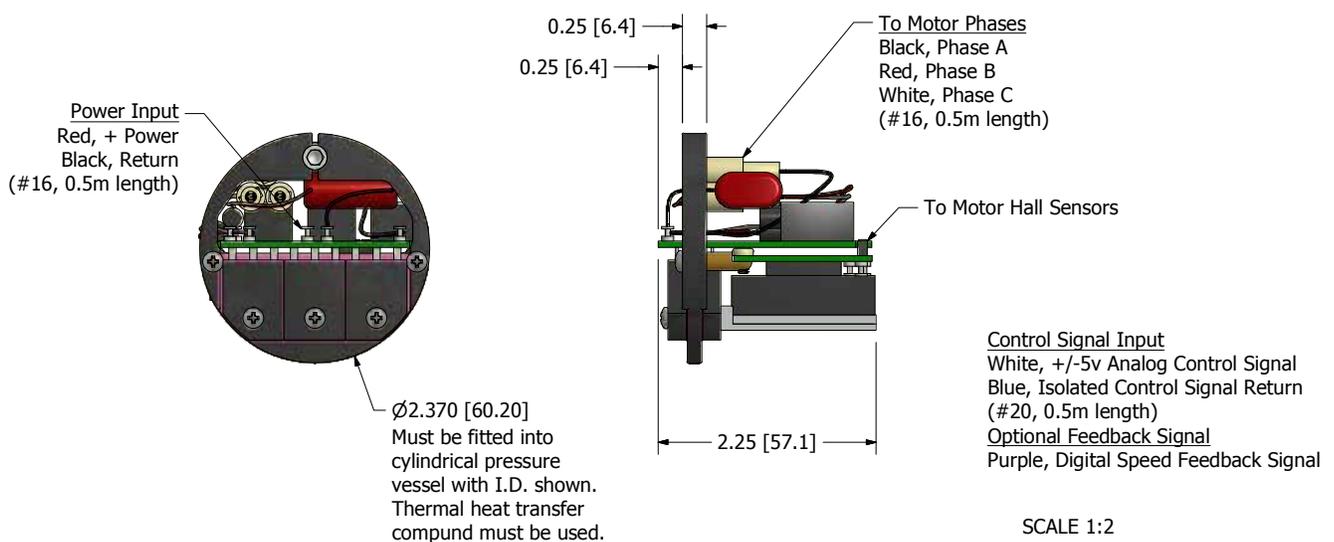

SCALE 1:2

Download STP solid model of this electronics module here:  
<http://www.tecnadyne.com/thrusters>

**1020 - AAA - BBBB - XX - CCCC - DD - EEEE - FF - HH - JJ**

**AAA** - Buss Voltage Option (Consult factory for other voltages)

<b>48</b> - 48vdc	<b>120</b> - 120vdc	<b>200</b> - 200vdc
<b>60</b> - 60vdc	<b>150</b> - 150vdc	<b>260</b> - 260vdc
<b>95</b> - 95vdc	<b>175</b> - 175vdc	<b>330</b> - 330vdc

**BBBB** - Subsea Connector Option (Consult factory for other connectors)

**LMG6FS** - SeaCon LMG-6-FS, cable end, for **SCLX** only, 95 to 330vdc only  
**MCIL5M** - SeaCon MCIL5M, cable end, for **SCLX** only, 95 to 330vdc only, no speed feedback  
**MCIL6M** - SeaCon MCIL5M, cable end, for **SCLX** only, 95 to 330vdc only  
**MHDG7BCR** - Impulse MHDG-7-BCR, bulkhead mount, **SCLX** only, 95-330vdc only  
**MHDG8CCP** - Impulse MHDG-8-BCR, oil filled tubing, for **HPFX** or **HPRX**, all voltages  
**IL6M** - SeaCon IL6M, cable end, for **SCLX** only, all voltages  
**XSL6ACCP** - SeaCon XSL-6A-CCP, cable end, **SCLX** only, all voltages

for technical details on the referenced connectors please go to [www.seaconworld.com](http://www.seaconworld.com) & [www.impulse-ent.com](http://www.impulse-ent.com)

**XX** - Cable Length Option (Does not apply to BCR or FCR style connectors)

**XX** - Cable Length in X.X meters - leave as XX if no cable installed

**CCCC** - Maximum Operating Depth Option

**0850** - 850 meters (2800 ft)  
**1500** - 1,500 meters (5,000 ft), (extra cost option)  
**CUST** - Customer Specified Depth (Requires Oil Filled Pressure Compensated option, above)

**DD** - Material of All Wetted Metallic Surfaces Option

**AL** - 6061-T6 Aluminum, Hard Anodized Black  
**SS** - Type 316 Stainless Steel, Passivated (extra cost option)  
**TI** - 6Al4V Titanium (extra cost option)

**EEEE** - Self Contained or Remote Electronics Option

**SCLX** - Self Contained Electronics (electronics in housing with motor)  
**HPFX** - Remote Electronics, Square heat plate electronics, 1 Atmosphere Motor Housing  
**HPRX** - Remote Electronics, Round heat plate electronics, 1 Atmosphere Motor Housing  
the Model 1020 can also be supplied with the **RSOF** or the **RROF** electronics from the Model 1060

**FF** - Mounting Option

**SM** - Saddle Mount **BM** - Blade Mount (extra cost option)

**HH** - Propeller Handing Option

**LH** - Left Hand, Nylon Propeller **RS** - Right Hand, Stainless Steel Propeller


**LS** - Left Hand, Stainless Steel Propeller

the **RS** propeller must be used with the **LS** propeller as the thrust characteristics of the **LH** propeller do not match


**JJ** - Nozzle Options

**BK** - Black **UK** - Blue (extra cost option)

**Model 1020 Thruster**  
**Input Power & Thrust vs. Propeller RPM**

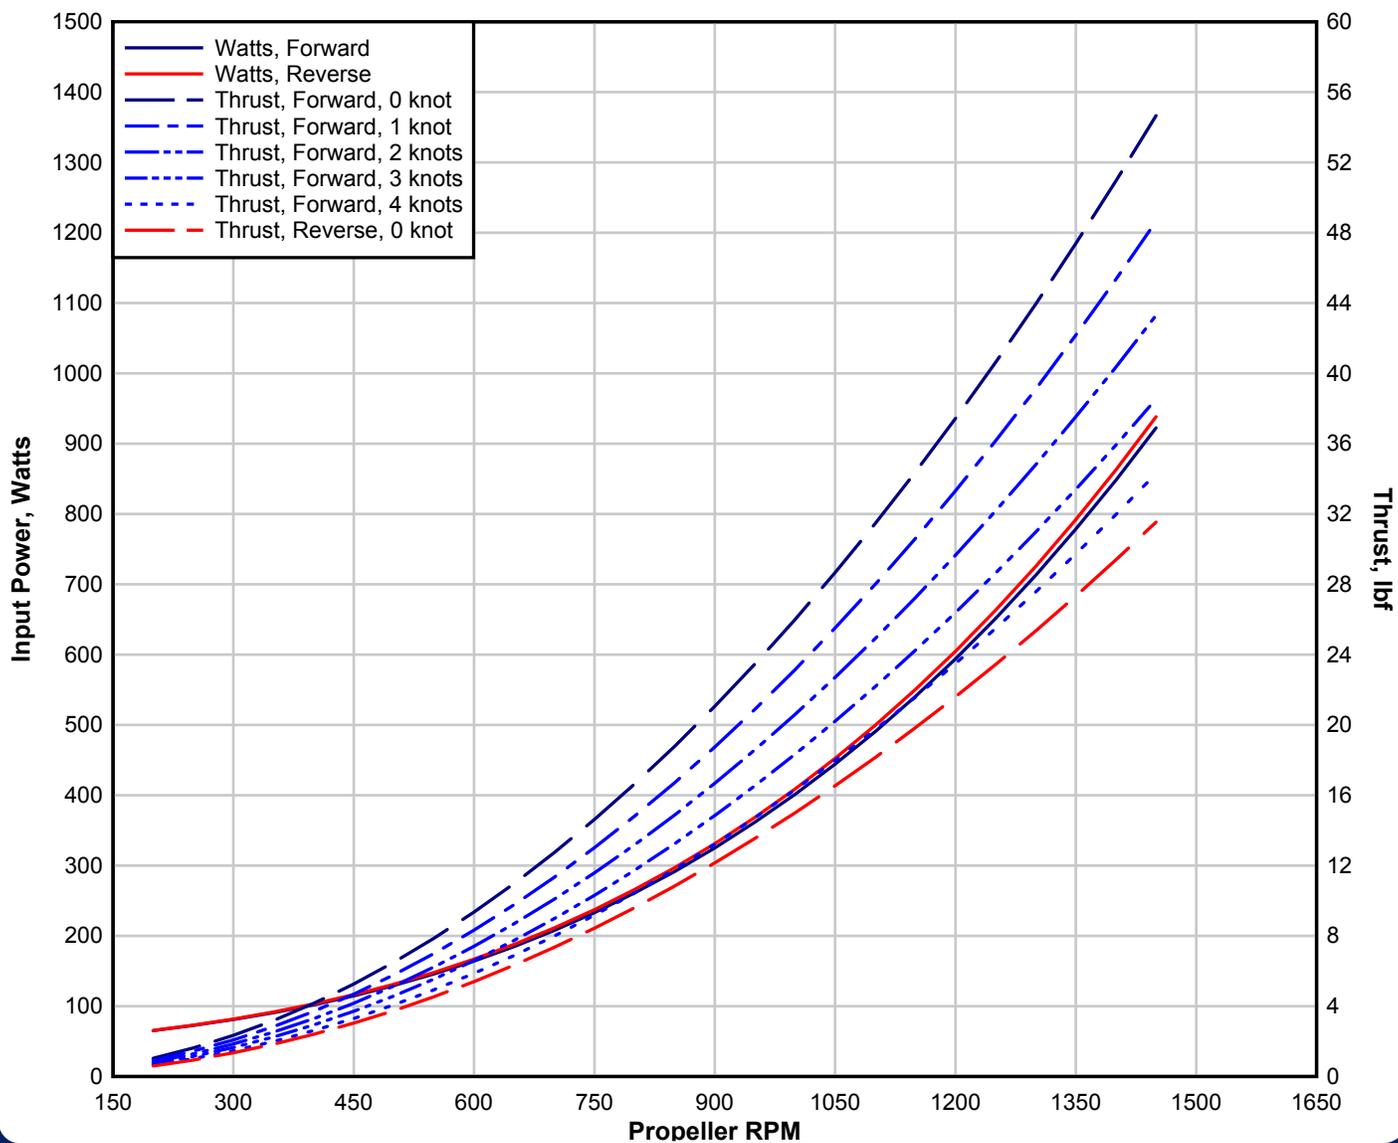

**Model 1020 Thruster**  
**Thrust vs. Voltage Change**

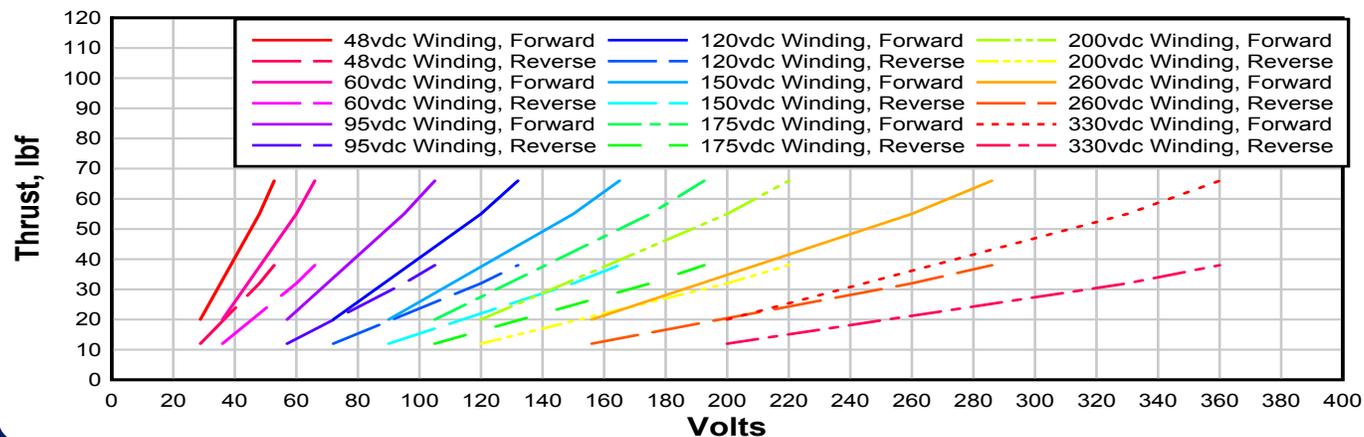

## WHAT WERE YOU DOING 30 YEARS AGO?

In 1985 Tecnadyme delivered its first thrusters, six Model 1020's that were installed on the original RTV-500 built by Mitsui Engineering & Shipbuilding (MES) of Tokyo. Since that time, we have manufactured and delivered over 6,000 thrusters, including more than 600 of the Model 1020. And even though the Model 1020 that we build today incorporates over 32 design revisions to improve reliability, efficiency and maintainability – that thruster is still 100% compatible with the Model 1020 that was installed on that first RTV-500 system more than 30 years ago. This means that, after 30+ years, MES (or any of our customers) can still purchase or repair a Model 1020 thruster to keep its fleet of ROV's working. And in those 30 years, the Model 1020 thruster has powered vehicles to the Titanic, that discovered JFK's PT-109 in the Pacific, that participated in record depth wellhead completions off the coast of West Africa, that discovered lost cities in the Black Sea, that have scoured the world's oceans for mines, and that have successfully completed thousands of routine subsea missions. And the Model 1020 thruster is still being installed on new ROV and AUV systems worldwide.

And, like the Model 1020, Tecnadyme's twenty-one other thruster models have also served the offshore community with reliability, high performance and cost effectiveness – but none for quite as long as the Model 1020's 30 years. Tecnadyme is constantly developing and releasing new thruster models, with 4 new models released in 2010 and 4 models being released in 2013.

It is Tecnadyme's commitment to its customers and to the subsea community that no vehicle system, be it an ROV, an AUV, a manned submersible or any other subsea system, will ever be made obsolete because the Tecnadyme thrusters installed on that system are no longer available for a reasonable and competitive price.

So, for your next ROV, AUV or manned submersible build or purchase, be sure to specify only genuine Tecnadyme thrusters. You, your operators, your technicians and your customers will be glad you did – for the next 30 years.

## QUALITY ASSURANCE

Tecnadyme operates under a Quality Plan that is fully ISO 9001:2008 compliant. All electrical soldering is performed by technicians certified to the IPC J-STD-009 & IPC-A-610 standards.

## FINAL TEST & INSPECTION

All Tecnadyme products undergo a rigorous set of final test procedures. Each thruster is operated at reduced power and full power in both directions for extended time periods. Each thruster is pressure tested and then subjected to an insulation breakdown test to identify leaks or other problems. Prior to shipment to the customer, each thruster is certified to perform correctly and to factory specifications.

## EXPRESS LIMITED WARRANTY

Subsea thruster motors manufactured by Tecnadyme are warranted to the original Purchaser for a period of one year from the date of shipment from the factory to conform to Tecnadyme's specifications at the time of purchase and to be free of mechanical, electrical and physical defects in material and workmanship if the products have been installed, electrically connected, operated and serviced in accordance with Tecnadyme's instructions as listed in the Operations & Maintenance Manual accompanying the thrusters.

Except for the express warranty set forth herein, Tecnadyme makes no other warranties or guarantees, express, oral, implied or statutory, regarding its subsea thruster products. All such warranties are expressly disclaimed to the extent allowable by law.

**BUILT WITH PRIDE**



**IN THE U.S.A.**



9770 Carroll Centre Road, Suite C

San Diego, CA 92126, USA

Voice & Fax: 1-858-586-9660

Ext 101 for Sales, Ext 104 for Service, Ext 113 for Deliveries



Visit our Website  
[www.tecnadyne.com](http://www.tecnadyne.com)

Friend us on Facebook  
[facebook.com/tecnadyne](http://facebook.com/tecnadyne)



Get our Tweets  
[@tecnadyne](https://twitter.com/tecnadyne)



Follow our Blog  
[tecnadyne.wordpress.com](http://tecnadyne.wordpress.com)



Meet on LinkedIn.com/  
[company/tecnadyne](http://company/tecnadyne)