



- Rotary actuator with right angle drive for lower profile in space critical applications.
- 400-1050w rotary actuator develops 200 ft-lb (270 Nm) of torque.
- Continuous 360° rotation, reversible, and continuously variable speed.
- Powerful, high speed DC brushless gear motor for reliability, efficiency and lightweight.
- 8 output speeds ranging from 3 rpm to 25 rpm with 10 input voltages of 24vdc to 275vdc.
- Available with +/-5v analog speed control or RS232/RS485 position control.
- Rated to full ocean depth with an oil filled, pressure balanced motor / gear housing and remote electronics in a 1-atmosphere housing or to 50m with a 1-atmosphere housing and self-contained electronics.
- Available with hard anodized aluminum, Type 316 stainless steel or 6Al4V titanium housings.
- Available with motors for 24vdc, 30vdc, 48vdc, 70vdc, 100vdc, 130vdc, 150vdc, 200vdc, 220vdc and 275vdc. Other voltages optional.
- Alternate output shafts available.

Output Speed

8 output speeds, 3rpm to 10rpm torque rated to 200 ft-lb (270Nm), 15rpm to 170 ft-lb (230 Nm) & 25rpm to 100 ft-lb (135 Nm).

Input

400-1050 W at voltages of 24 - 275vdc, +/-5v analog speed control or full digital servo speed, torque or position control.

Weight

18-38 lbs (8.2-17.3 kg) in air, 13-29 lbs (5.9 - 13.2 kg) in water, depending on configuration.

Depth Rating

Full ocean depth when oil filled with remote electronics, 150ft (50m) with 1 atm housings.

(specifications subject to change without notice)

Introduction

The Model 200 is one of Tecnadyn's right angle drive rotary actuators. With continuous, variable speed CW and CCW rotation, the Model 200 is perfectly suited for applications on AUV's, ROV's, manned sub's and subsea tooling packages.

Performance Characteristics

As with all of Tecnadyn's rotary actuators, the Model 200 has multiple gearing stages. The first stage is a 6/1 ratio planetary gearset. The intermediate gearing stage is a 3/1 bevel gear. The final stage is a harmonic drive in ratios from 30/1 to 160/1. Using different combinations of ratios, Tecnadyn is able to supply Model 200's with 8 output speeds ranging from 3 rpm to 25 rpm. The maximum output torque of 200 ft-lbs (270 Nm) at speeds to 10rpm. The 15rpm version is rated to 170 ft-lbs (230 Nm) and the 25rpm version is rated to 100 ft-lbs (135 Nm).

DC Brushless Motor

With a 3-phase DC brushless motor, the Model 200 delivers exceptional reliability and high power in an extremely compact, lightweight and easy to maintain package. As with all Tecnadyn actuators, the Model 200 motors are manufactured in the U.S. to the ISO 9001:2008 quality standard.

Position Feedback Option

The Model 200 can be fitted with an optional rotary position sensor, either a potentiometer or an optical encoder. This configuration is called a Model 201. One potentiometer option is offered and 12 encoder resolutions, from 100ppr to 2500ppr, are offered, in either line driver or open collector format.

Depth Rating Options

The standard Model 200 configuration utilizes an oil filled housing for the DC brushless motor and gearing units, thus requiring that the electronics module be installed in a remote, 1-atmosphere housing (customer supplied). This configuration is rated to full ocean depth and is compensated using flexible Tygon tubing for the cabling. Alternately, the Model

200 can have 1-atmosphere housings and internal electronics and is then rated to 150 fsw (50 msw).

Voltages Supported

The Model 200 is available for voltages of 24vdc, 30vdc, 48vdc, 70vdc, 100vdc, 150vdc, 200vdc, 220vdc and 275vdc. Alternate voltages are possible. DC power must be supplied by a well filtered battery bank, rectified and filtered AC or a regulated DC power supply with less than 10% voltage ripple.

Speed & Position Control

The oil filled configuration of the Model 200 is available with several remote controllers depending upon the customer's operating requirements and the available space in the customer's 1-atmosphere housing (or Tecnadyn can supply a suitable housing). The most compact remote electronics option (HPFX & HPRX) is an open loop speed mode controller which accepts a +/-5v analog speed control signal. Alternately, Tecnadyn can supply an Advanced Motion Controls servo drive in two voltage ranges (AMCR & AMCE), that operate in current, velocity or position mode. The 50m depth rated, 1-atmosphere version of the Model 200 can be supplied with an internal controller. This is an open loop speed mode controller accepting a +/-5v analog command signal.

Electro-magnetic Brake Option

The holding or backdrive torque of an unpowered actuator is 25%-50% of the rated torque, depending on gearing ratio. If higher holding torque is required, an optional electro-magnetic brake can be installed.

Other Options

Optional configurations include: housings made from hard anodized aluminum (standard), Type 316 stainless steel or 6Al4V titanium; several bulkhead type or cable end subsea connectors; and custom output shaft configurations.

Please note that these specifications are subject to change without notice.


Go to www.tecnadyne.com



Like Tecnadyn on
Facebook




MODEL 200

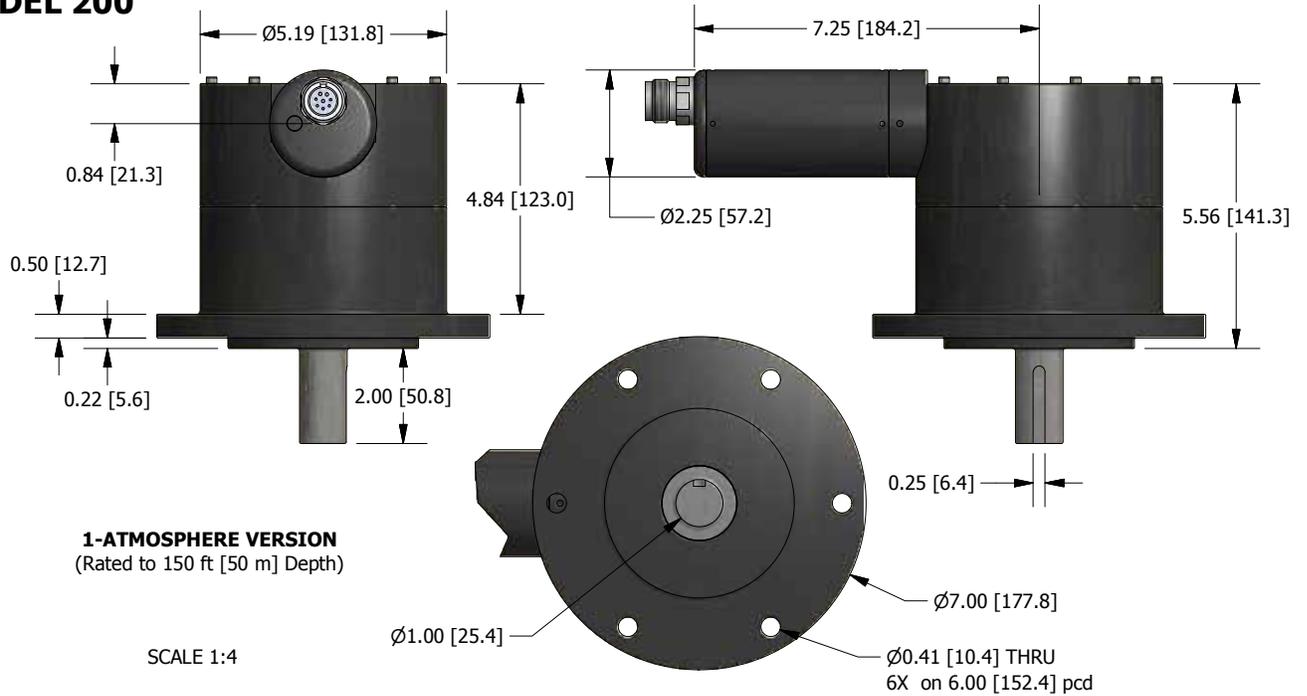


Download STP solid model of this rotary actuator here:
http://www.tecnadyne.com/rotary_actuators

MODEL 200

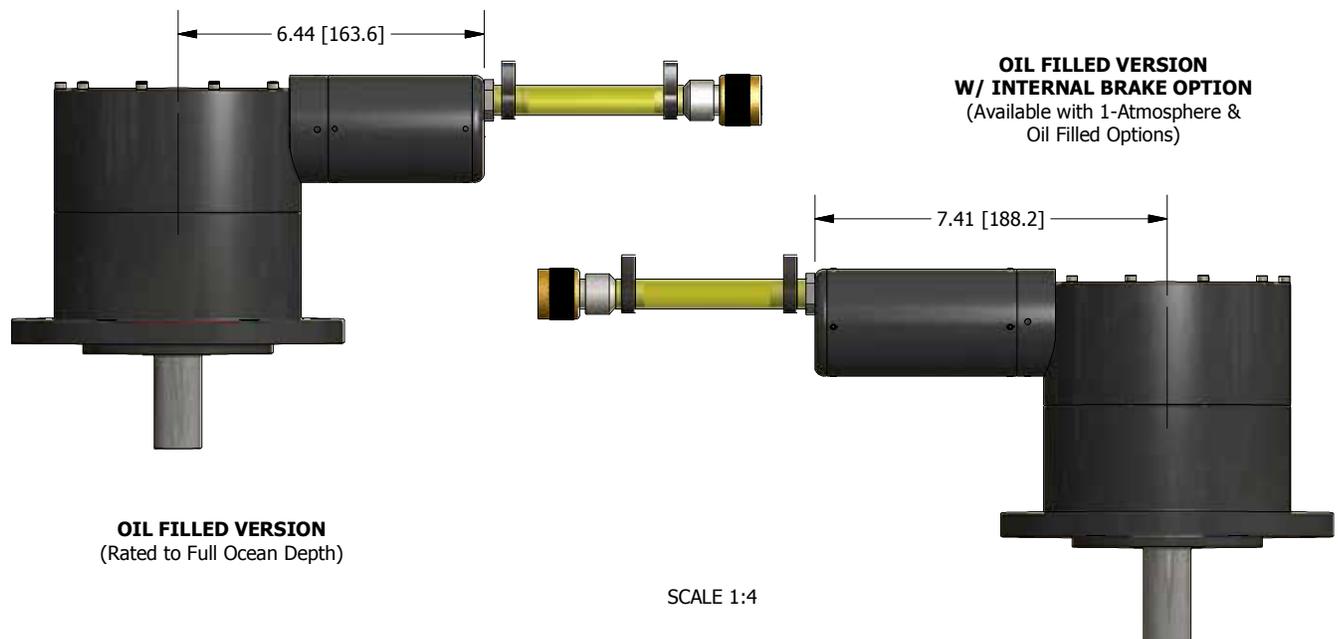


Download STP solid model of this rotary actuator here:
http://www.tecnadyne.com/rotary_actuators

MODEL 201

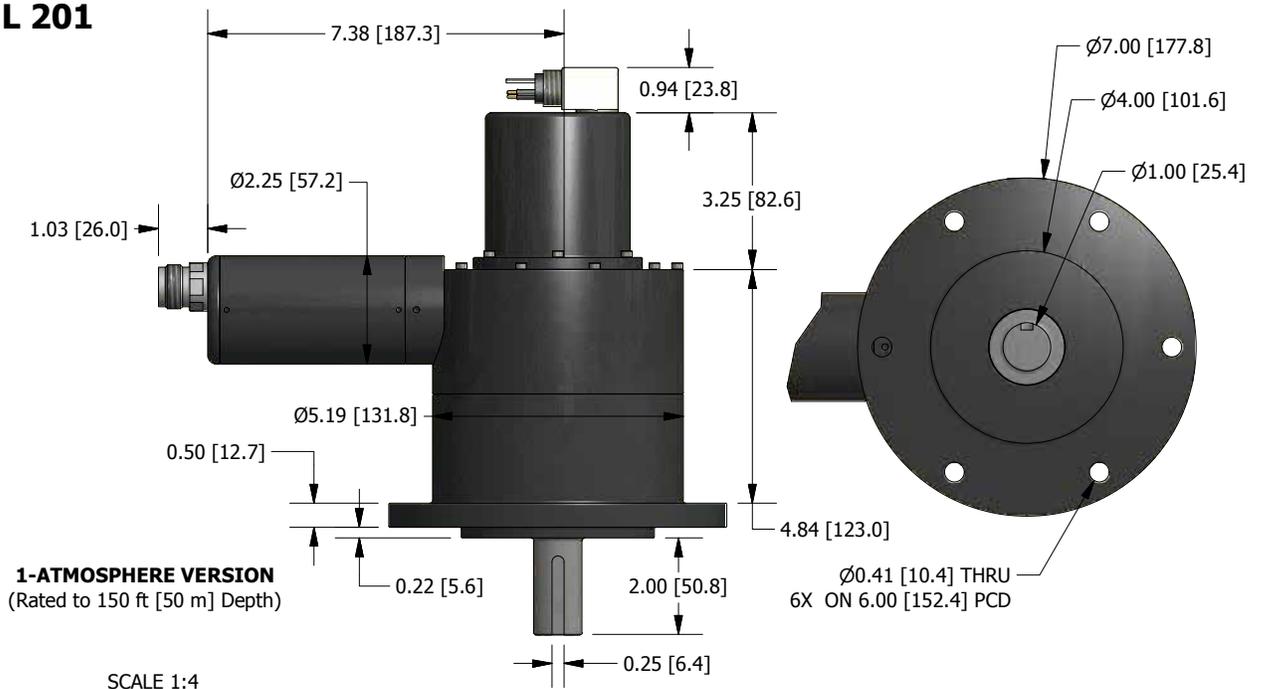

Download STP solid model of this rotary actuator here:
http://www.tecnadyne.com/rotary_actuators



MODEL 201

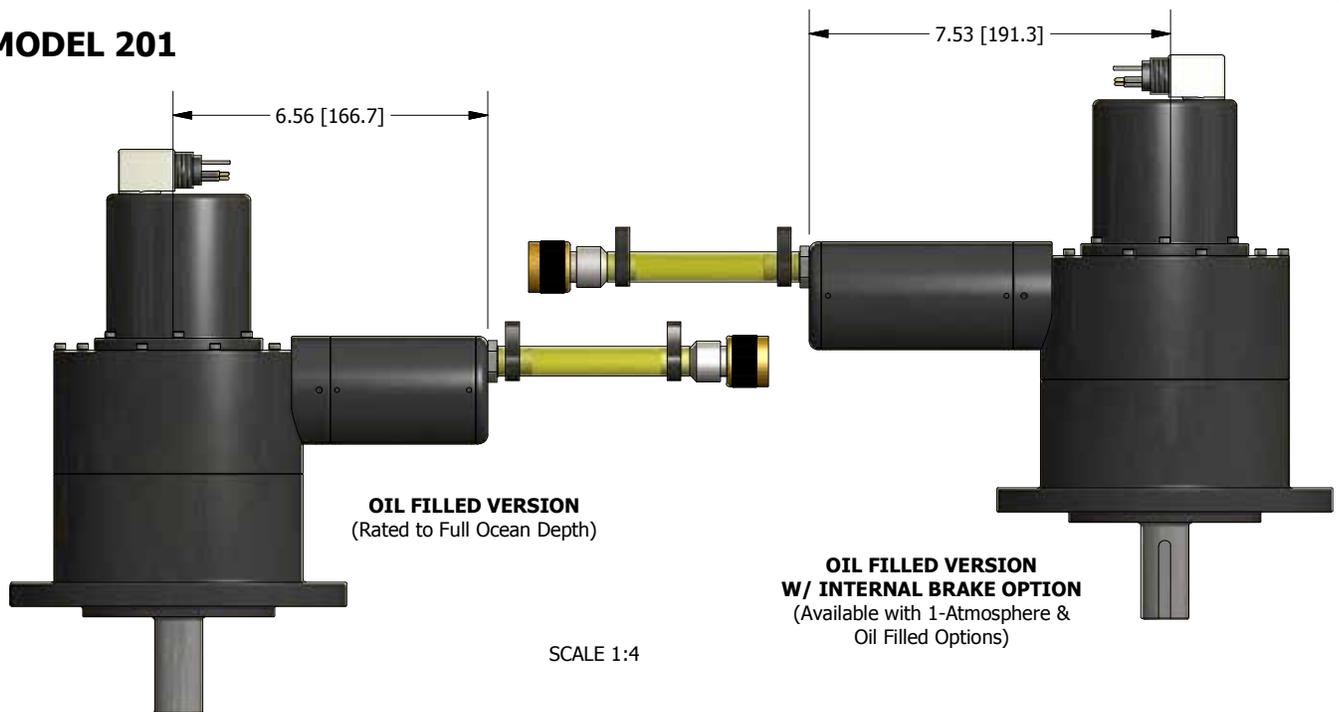

Download STP solid model of this rotary actuator here:
http://www.tecnadyne.com/rotary_actuators

REMOTE ELECTRONICS MODULE, HPFX CONFIG

USED IN THE **HPFX** CONFIGURATION & INSTALLED IN CUSTOMER FURNISHED PRESSURE VESSEL.

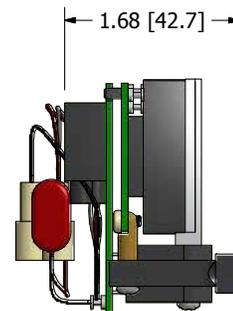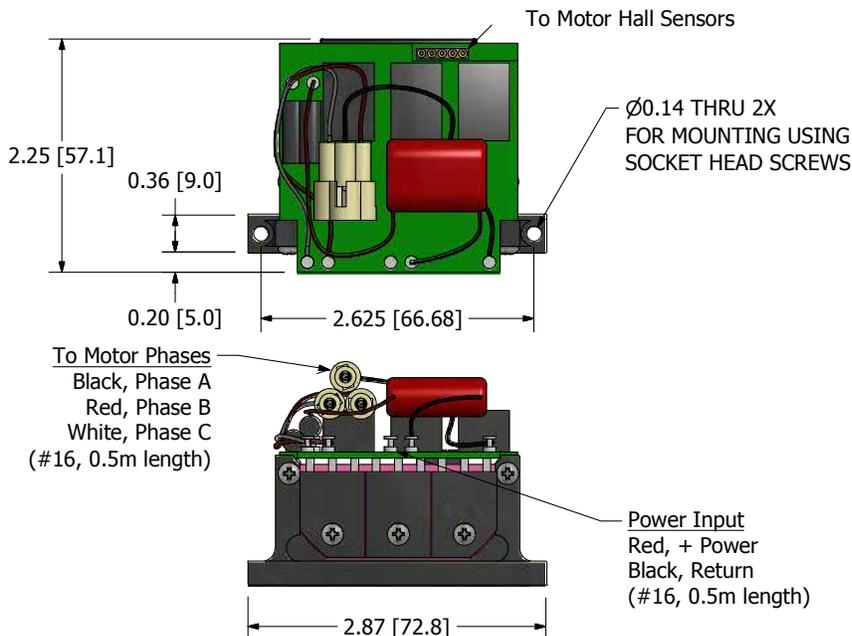


Control Signal Input
White, +/-5v Analog Control Signal
Blue, Isolated Control Signal Return (#20, 0.5m length)
Optional Feedback Signal
Purple, Digital Speed Feedback Signal

SCALE 1:2

Download STP solid model of this electronics module here:
http://www.tecnadyne.com/rotary_actuators

REMOTE ELECTRONICS MODULE, HPRX CONFIG

USED IN THE **HPRX** CONFIGURATION & INSTALLED IN CUSTOMER FURNISHED PRESSURE VESSEL.

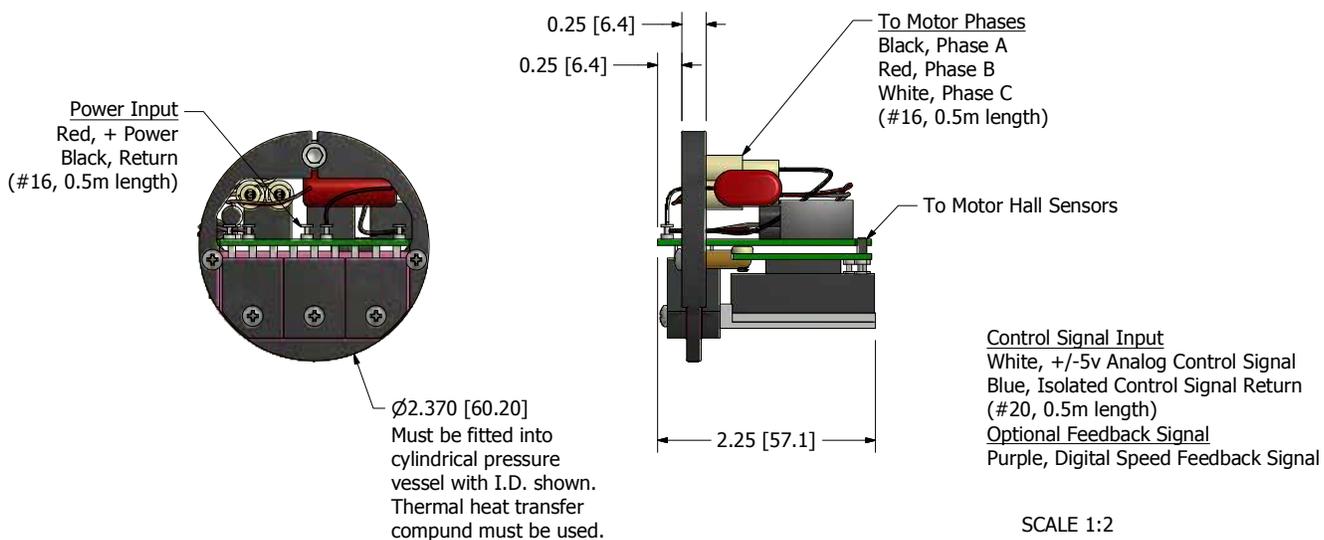

Control Signal Input
White, +/-5v Analog Control Signal
Blue, Isolated Control Signal Return (#20, 0.5m length)
Optional Feedback Signal
Purple, Digital Speed Feedback Signal

SCALE 1:2

Download STP solid model of this electronics module here:
http://www.tecnadyne.com/rotary_actuators


REMOTE ELECTRONICS MODULE, AMCR CONFIG

ADVANCED MOTION CONTROLS DPRALTE-060B080E.

REFER TO THE ADVANCED MOTION CONTROLS WEBSITE FOR ADDITIONAL TECHNICAL INFORMATION ABOUT THIS CONTROLLER -- WWW.A-M-C.COM

Input Voltage Range
20vdc - 80vdc
Input Control Signals
+/-10 analog, RS232 / RS485

SCALE 1:2

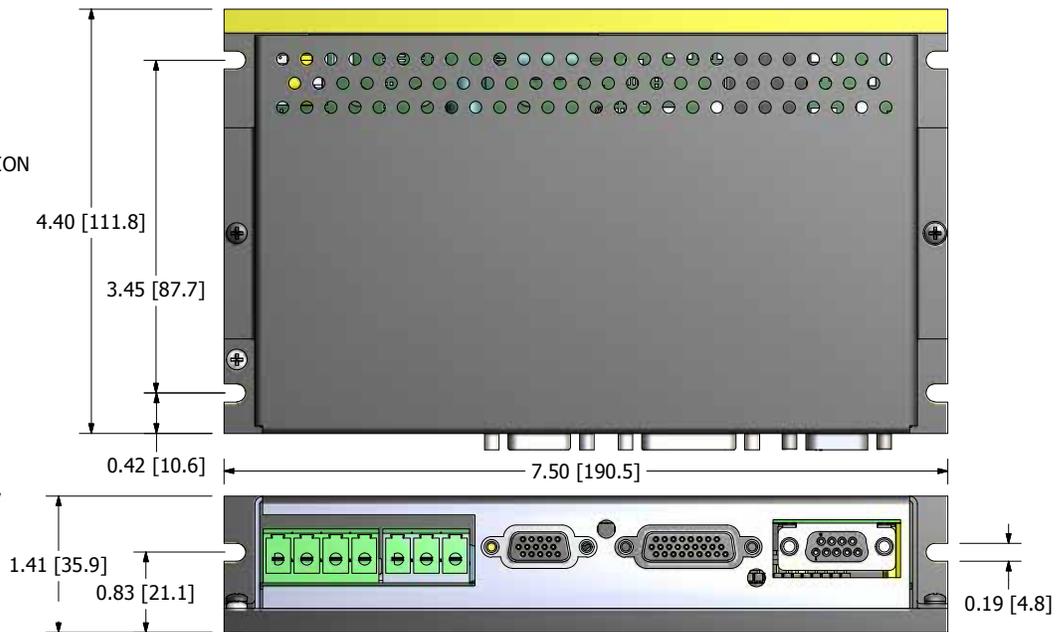

Download STP solid model of this electronics module here:
http://www.tecnadyne.com/rotary_actuators


REMOTE ELECTRONICS MODULE, AMCE CONFIG

ADVANCED MOTION CONTROLS DPRANIE-030A400E.

REFER TO THE ADVANCED MOTION CONTROLS WEBSITE FOR ADDITIONAL TECHNICAL INFORMATION ABOUT THIS CONTROLLER -- WWW.A-M-C.COM

Input Voltage Range
127vdc - 373vdc
Input Control Signals
+/-10 analog, RS232 / RS485

SCALE 1:2

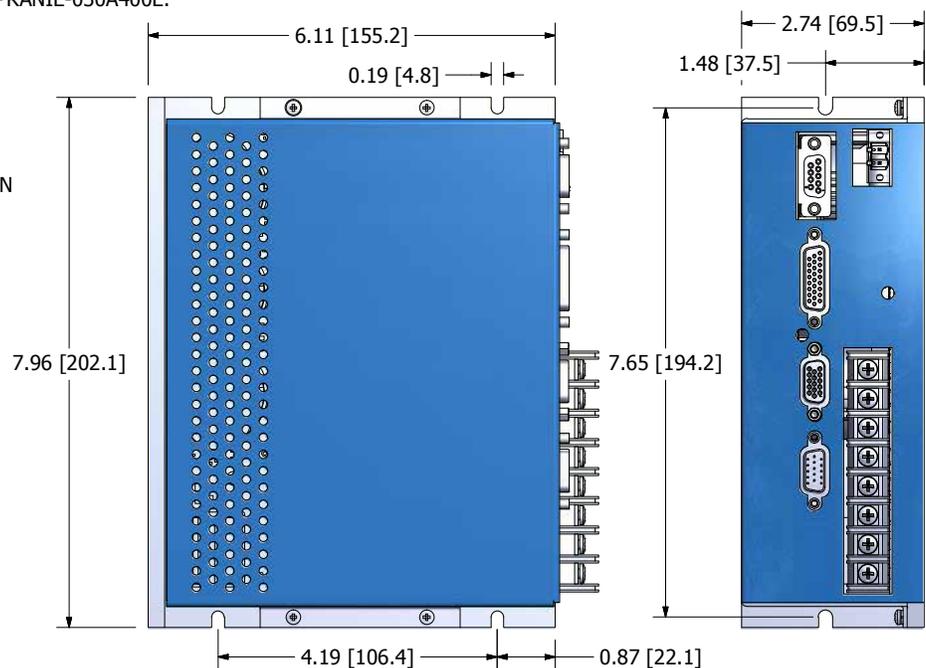

Download STP solid model of this electronics module here:
http://www.tecnadyne.com/rotary_actuators

200 - AAA - BB - CCCCC - XX - DD - EEEE - Y

AAA - Buss Voltage Option (Consult factory for other voltages)

24 - 24vdc

30 - 30vdc

48 - 48vdc

70 - 70vdc

100 - 100vdc

130 - 130vdc

150 - 150vdc

200 - 200vdc

220 - 220vdc

275 - 275vdc

BB - Output Speed Option (Consult factory for other speeds)

3 - 3rpm, 400W

4 - 4rpm, 450W

5 - 5rpm, 550W

7 - 7rpm, 700W

8 - 8rpm, 800W

10 - 10rpm, 950W

15 - 15rpm, 1kW, 170 ft-lb (230Nm)

25 - 25rpm, 1.05kW, 100 ft-lb (135Nm)

CCCCC - Motor Subsea Connector Option (Consult factory for other connectors)

MHDG8CCP - Impulse MHDG-8-CCPOF, oil filled tubing, for oil filled, remote electronics only

MHDG10CCP - Impulse MHDG-10-CCPOF, oil filled tubing, for oil filled, remote elec with brake only

MHDG7BCR - Impulse MHDG-7-BCR, bulkhead mount, 50m 1-atmosphere only

XSL12CCPPBOF - SeaCon XSL-12-CCP-PBOF, oil filled tubing, for oil filled, remote elec with brake

MSAL8CCP - Impulse MSAL-8-CCPOF, oil filled tubing, for oil filled, remote electronics only

MSAL8CCP - SeaCon MSAL-18-CCPOF, oil filled tubing, for oil filled, remote elec with brake

for technical details on the referenced connectors please go to www.seaconworld.com, www.subconn.com & www.impulse-ent.com

XX - Cable Length Option (Does not apply to MCBH style connectors)

XX - Cable Length in X.X meters - leave as XX if no cable installed

DD - Material of All Wetted Metallic Surfaces Option

AL - 6061-T6 Aluminum, Hard Anodized Black

SS - Type 316 Stainless Steel, Passivated

TI - 6Al4V Titanium

EEEE - Remote Electronics Option (oil filled, full ocean depth) or Internal Electronics (50m depth)

HPFX - Remote Electronics, Flat mount in customer 1-Atm. Housing, Oil filled full ocean depth actuator

HPRX - Remote Elec., Round mount in customer 1-Atm. Housing, Oil filled full ocean depth actuator

AMCR - Remote Elec., 20-80vdc, AMC DPRALTE in 1-Atm. Housing, Oil filled full ocean depth actuator

AMCE - Remote Elec., 127-373vdc, AMC DPRANIE in 1-Atm. Housing, Oil filled full ocean depth actuator

INTX - Internal Electronics, 1-Atmosphere actuator, 150 fsw (50m) max. depth, +/-5v analog control only

for technical details on the referenced AMC controllers, please go to www.A-M-C.com

Y - Brake Option

Y - No brake

B - Electro-magnetic brake installed

201 - AAA - BB - CCCCC - XX - DD - EEEE - Y - FFFFF - GG - ZZZZ

AAA - Buss Voltage Option (Consult factory for other voltages)

24 - 24vdc	70 - 70vdc	150 - 150vdc
30 - 30vdc	100 - 100vdc	200 - 200vdc
48 - 48vdc	130 - 130vdc	220 - 220vdc
		275 - 275vdc

BB - Output Speed Option (Consult factory for other speeds)

3 - 3rpm, 400W	7 - 7rpm, 700W	15 - 15rpm, 1kW, 170 ft-lb (230Nm)
4 - 4rpm, 450W	8 - 8rpm, 800W	25 - 25rpm, 1.05kW, 100 ft-lb (135Nm)
5 - 5rpm, 550W	10 - 10rpm, 950W	

CCCCC - Motor Subsea Connector Option (Consult factory for other connectors)

MHDG8CCP - Impulse MHDG-8-CCPOF, oil filled tubing, for oil filled, remote electronics only

MHDG10CCP - Impulse MHDG-10-CCPOF, oil filled tubing, for oil filled, remote elec with brake only

MHDG7BCR - Impulse MHDG-7-BCR, bulkhead mount, 50m 1-atmosphere only

XSL12CCPPBOF - SeaCon XSL-12-CCP-PBOF, oil filled tubing, for oil filled, remote elec with brake

MSAL8CCP - Impulse MSAL-8-CCPOF, oil filled tubing, for oil filled, remote electronics only

MSAL8CCP - SeaCon MSAL-18-CCPOF, oil filled tubing, for oil filled, remote elec with brake

XX - Cable Length Option (Does not apply to MCBH style connectors)

XX - Cable Length in X.X meters - leave as XX if no cable installed

DD - Material of All Wetted Metallic Surfaces Option

AL - 6061-T6 Aluminum, Hard Anodized Black	TI - 6Al4V Titanium
SS - Type 316 Stainless Steel, Passivated	

EEEE - Remote Electronics Option (oil filled, full ocean depth) or Internal Electronics (50m depth)

HPFX - Remote Electronics, Flat mount in customer 1-Atm. Housing, Oil filled full ocean depth actuator

HPRX - Remote Elec., Round mount in customer 1-Atm. Housing, Oil filled full ocean depth actuator

AMCR - Remote Elec., 20-80vdc, AMC DPRALTE in 1-Atm. Housing, Oil filled full ocean depth actuator

AMCE - Remote Elec., 127-373vdc, AMC DPRANIE in 1-Atm. Housing, Oil filled full ocean depth actuator

INTX - Internal Electronics, 1-Atmosphere actuator, 150 fsw (50m) max. depth, +/-5v analog control only

Y - Brake Option

Y - No brake	B - Electro-magnetic brake installed
---------------------	---

FFFFF - Position Sensor Subsea Connector Option (Consult factory for other connectors)

MCBHRA3M - Subconn MCBHRA3M, for use with potentiometer sensors only

MCBHRA5M - Subconn MCBHRA5M, for use with potentiometer and open collector encoder only

MCBHRA8M - Subconn MCBHRA8M, for use with line driver encoder

FAWL-3P-BC-R/A - SeaCon FAWL-3P-BC-R/A, for use with potentiometer sensors only

FAWL-5P-BC-R/A - SeaCon FAWL-5P-BC-R/A, for use with potentiometer & open collector encoder

FAWM-8P-BC-R/A - SeaCon FAWM-8P-BC-R/A, for use with line driver encoder

GG - Position Sensor Option

POT - Potentiometer	OC - Open Collector Encoder	LD - Line Driver Encoder
----------------------------	------------------------------------	---------------------------------

ZZZZ - Encoder Resolution Option (leave blank if encoder not fitted)

100 - 100ppr	360 - 360ppr	600 - 600ppr	1024 - 1024ppr
200 - 200ppr	400 - 400ppr	800 - 800ppr	2000 - 2000ppr
300 - 300ppr	500 - 500ppr	1000 - 1000ppr	2500 - 2500ppr

WHAT WERE YOU DOING 30 YEARS AGO?

In 1985 Tecnadyme delivered its first thrusters, six Model 1020's that were installed on the original RTV-500 built by Mitsui Engineering & Shipbuilding (MES) of Tokyo. Since that time, we have manufactured and delivered over 6,000 thrusters, including more than 600 of the Model 1020. And even though the Model 1020 that we build today incorporates over 32 design revisions to improve reliability, efficiency and maintainability – that thruster is still 100% compatible with the Model 1020 that was installed on that first RTV-500 system more than 30 years ago. This means that, after 30+ years, MES (or any of our customers) can still purchase or repair a Model 1020 thruster to keep its fleet of ROV's working. And in those 30 years, the Model 1020 thruster has powered vehicles to the Titanic, that discovered JFK's PT-109 in the Pacific, that participated in record depth wellhead completions off the coast of West Africa, that discovered lost cities in the Black Sea, that have scoured the world's oceans for mines, and that have successfully completed thousands of routine subsea missions. And the Model 1020 thruster is still being installed on new ROV and AUV systems worldwide.

And, like the Model 1020, Tecnadyme's twenty-one other thruster models have also served the offshore community with reliability, high performance and cost effectiveness – but none for quite as long as the Model 1020's 30 years. Tecnadyme is constantly developing and releasing new thruster models, with 4 new models released in 2010 and 4 models being released in 2013.

It is Tecnadyme's commitment to its customers and to the subsea community that no vehicle system, be it an ROV, an AUV, a manned submersible or any other subsea system, will ever be made obsolete because the Tecnadyme thrusters installed on that system are no longer available for a reasonable and competitive price.

So, for your next ROV, AUV or manned submersible build or purchase, be sure to specify only genuine Tecnadyme thrusters. You, your operators, your technicians and your customers will be glad you did – for the next 30 years.

QUALITY ASSURANCE

Tecnadyme operates under a Quality Plan that is fully ISO 9001:2008 compliant. All electrical soldering is performed by technicians certified to the IPC J-STD-009 & IPC-A-610 standards.

FINAL TEST & INSPECTION

All Tecnadyme products undergo a rigorous set of final test procedures. Each thruster is operated at reduced power and full power in both directions for extended time periods. Each thruster is pressure tested and then subjected to an insulation breakdown test to identify leaks or other problems. Prior to shipment to the customer, each thruster is certified to perform correctly and to factory specifications.

EXPRESS LIMITED WARRANTY

Subsea thruster motors manufactured by Tecnadyme are warranted to the original Purchaser for a period of one year from the date of shipment from the factory to conform to Tecnadyme's specifications at the time of purchase and to be free of mechanical, electrical and physical defects in material and workmanship if the products have been installed, electrically connected, operated and serviced in accordance with Tecnadyme's instructions as listed in the Operations & Maintenance Manual accompanying the thrusters.

Except for the express warranty set forth herein, Tecnadyme makes no other warranties or guarantees, express, oral, implied or statutory, regarding its subsea thruster products. All such warranties are expressly disclaimed to the extent allowable by law.

BUILT WITH PRIDE



IN THE U.S.A.



9770 Carroll Centre Road, Suite C

San Diego, CA 92126, USA

Voice & Fax: 1-858-586-9660

Ext 101 for Sales, Ext 104 for Service, Ext 113 for Deliveries



Visit our Website
www.tecnadyne.com

Friend us on Facebook
facebook.com/tecnadyne



Get our Tweets
[@tecnadyne](https://twitter.com/tecnadyne)



Follow our Blog
tecnadyne.wordpress.com



Meet on LinkedIn.com/
company/tecnadyne